

SUBSTITUTE FORM PTO-1390

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER  
11777-679001

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (If Known, see 37 CFR 1.5)  
**09/744724**

INTERNATIONAL APPLICATION NO  
PCT/TR99/00036

INTERNATIONAL FILING DATE  
29 July 1999

PRIORITY DATE CLAIMED  
29 July 1998

TITLE OF INVENTION  
COMPOSITION FOR USE IN A WATER RESERVOIR

APPLICANT(S) FOR DO/EO/US  
Guido WAESCHENBACH, Ralf WIEDEMANN, Enric CARBONELL, Edgar ENDLEIN and Karl-Ludwig GIBIS

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☐ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made, however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) (UNSIGNED).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items 11 to 16 below concern other documents or information included:**

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.  
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:

☐  
☐  
☐  
☐  
☐

**CERTIFICATE OF MAILING BY EXPRESS MAIL**

Express Mail Label No. **EF 35381560545**

I hereby certify, under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington D.C. 20231

**January 29, 2001**  
Date of Deposit

*Francisco Robles*  
Signature

**Francisco Robles**  
Typed Name of  
Person Signing

U.S. APPLICATION NO. (IF KNOWN) <b>097744724</b>		INTERNATIONAL APPLICATION NO. PCT/TR99/00036		ATTORNEY'S DOCKET NUMBER 11777-679001	
17. <input type="checkbox"/> The following fees are submitted: <b>Basic National Fee ( 37 CFR 1.492(a)(1)-(5) ):</b>  Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO... \$1000  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO .... \$860  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO. .... \$710  International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4)..... \$690  International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4)..... \$100  <div style="text-align: right;"><b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b></div>				<b>CALCULATIONS</b> PTO USE ONLY	
Surcharge of <b>\$130</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$0.00	
Claims	Number Filed	Number Extra	Rate		
Total Claims	58 - 20 =	38	x \$18	\$684.00	
Independent Claims	1 - 3 =	0	x \$80	\$0.00	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ \$270	\$270.00	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$1,954.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00	
<b>SUBTOTAL =</b>				\$0.00	
Processing fee of <b>\$130</b> for furnishing the English Translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f))				\$0.00	
<b>TOTAL NATIONAL FEE =</b>				\$1,954.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) <b>\$40.00</b> per property +				\$0.00	
<b>TOTAL FEES ENCLOSED =</b>				\$1,954.00	
				<b>Amount to be refunded:</b>	\$
				<b>Charged:</b>	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$1,954.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 06-1050 in the amount of \$0 00 to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 06-1050. A duplicate copy of this sheet is enclosed.					
<b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive          (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b>					
SEND ALL CORRESPONDENCE TO					
Frederick H. Rabin FISH & RICHARDSON P.C. 45 Rockefeller Plaza, Suite 2800 New York, NY 10111 (212) 765-5070 phone (212) 258-2291 facsimile Date: <u>29 January 2001</u>			<div style="text-align: center;"><i>Frederick H. Rabin</i></div> SIGNATURE  NAME Frederick H. Rabin  REGISTRATION NUMBER 24,488		

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Guido WAESCHENBACH et al.  
Int'l Appln.: PCT/TR99/00036  
Int'l Date : 29 July 1999  
Title : COMPOSITION FOR USE IN A WATER RESERVOIR

**Box: PCT**  
Commissioner for Patents  
Washington, D.C. 20231

FIRST PRELIMINARY AMENDMENT

Prior to examination, please amend the application as follows:

In the Claims:

Cancel claims 1-51 and replace with the following new claims 52-102.

52. A composition for use in a water tank, said composition comprising  
a basic composition (2; 3; 2') which essentially deploys its function  
following a first addition of water to the tank,  
at least one particle (6; 6'; 6'') having  
at least one core (8; 8'; 8'') comprising at least one substance  
essentially deploying its function after a complete or partial  
emptying of the first-addition water from the tank and inflow into  
said tank of fresh water, and

## CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EF353815005US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D C 20231

January 29, 2001

Date of Deposit

Francisco Robles  
Signature

Francisco Robles

Typed or Printed Name of Person Signing Certificate

10 a covering (9; 9'; 9") substantially completely surrounding each core,  
said covering comprising at least one compound whose solubility  
increases with decreasing concentration of a specific compound in  
the medium surrounding the particle,

and

15 an agent to prevent significant dissolution of the covering or significant  
detachment of said covering from the core (8; 8') or cores (8") until the  
inflow of the fresh water into the tank.

53. A composition according to claim 52, in which the concentration of the  
specific compound in the medium surrounding the particle or particles is, until the inflow  
of fresh water into the tank, sufficiently high to prevent significant dissolution of the  
covering or significant detachment of said covering from the core (8; 8') or cores (8").

54. A composition according to claim 53 in which each particle is coated with a  
substance which, substantially independently of the concentration of the specific  
compound in the surrounding medium, dissolves or separates from the particle during the  
period from the introduction of the composition to a filled water tank up to the complete  
5 or partial emptying of water from the water tank.

55. A composition according to claim 52, in which the basic composition is in  
the form of a tablet (1; 1').

56. A composition according to claim 55, in which the particle or particles are  
placed in or on the tablet in such a way that the concentration of the specific compound in  
the medium surrounding the particle or particles is, until a substantially complete  
dissolution of the tablet, sufficiently high to prevent significant dissolution of the  
5 covering or a significant detachment of said covering from the core.

57. A composition according to claim 56, in which all the particles are received in at least one cavity (4, 5) of the tablet (1) completely surrounded by the basic composition (2, 3).

58. A composition according to claim 57, in which each cavity contains one or more particles (6) which, alone or together, have essentially the same volume as the cavity.

59. A composition according to claim 57, in which one or more cavities has a larger volume than the particle or particles (6) contained in the particular cavity.

60. A composition according to claim 59, in which the particle or particles are placed loosely in the interior of the cavity.

61. A composition according to claim 59, in which the particle or particles are fixed in the interior of the cavity.

62. A composition according to claim 61, in which the particle or particles are fixed by an adhesive.

63. A composition according to claim 57, in which the cavity is positioned substantially centrally in the interior of the tablet.

64. A composition according to claim 63, in which the tablet has a single substantially spherical cavity.

65. A composition according to claim 64, in which the cavity contains a single substantially spherical particle whose external diameter is smaller than the internal diameter of the cavity.

66. A composition according to claim 56, in which the particle or particles (6'; 6'') are received in at least one cavity (5) of the tablet (1), which is only partly surrounded by the basic composition.

67. A composition according to claim 56, in which the particle or particles (6'; 6'') are received in a depression (4') in one of the surfaces (11') of the tablet (1').

68. A composition according to claim 66 or 67, in which the particle or particles are placed in the cavity or depression in such a way that they do not project over the surface or surfaces of the tablet.

69. A composition according to claim 68, in which the cavity or depression contains only a single particle whose volume and shape in the vicinity of the cavity or depression substantially coincides with the volume and shape of the cavity or depression and substantially completely fills said cavity or depression.

70. A composition according to claim 69, in which the cavity or depression is parallel to the surface to which it opens or in which it is placed and has a substantially circular cross-sectional area.

71. A composition according to claim 70, in which the cavity or depression is open to the surface only to the extent that the particle or particles located therein cannot pass out of said cavity or depression.

72. A composition according to claim 71, in which the particle or particles are loosely arranged in the cavity or depression.

73. A composition according to claim 71, in which the particle or particles are fixed in the cavity or depression.

74. A composition according to claim 73, in which the particle or particles are fixed by an adhesive (10').

75. A composition according to claim 52, in which the covering comprises at least one compound, which (a), at the concentration of the specific compound prior to the inflow of fresh water, is insoluble or is only slightly soluble and (b), at the concentration of the specific compound following the inflow of an adequate quantity of fresh water, has an adequate solubility for it to be so significantly dissolved or detached from the core or cores so that a complete or partial escape of the core material into the surrounding medium is made possible.

76. A composition according to claim 75, in which the solubility of the specific compound increases with decreasing OH<sup>-</sup> ionic concentration in the surrounding medium.

77. A composition according to claim 76, in which the specific compound is a polymer.

78. A composition according to claim 77, in which the specific compound is a pH-sensitive polymer, which comprises at least one repeat unit having at least one basic function not forming part of the polymer backbone chain.


79. A composition according to claim 78, in which a repeat unit is based on a compound selected from the group consisting of vinyl alcohol derivatives, acrylates and alkyl acrylates having said basic function.

80. A composition according to claim 78, in which the polymer is a carbohydrate functionalized with said basic function.

81. A composition according to claim 78, in which the basic function is an amine.

82. A composition according to claim 81, in which the amine is a secondary or tertiary amine.

83. A composition according to claim 81, in which the repeat unit of the polymer is based on a compound of formula III:

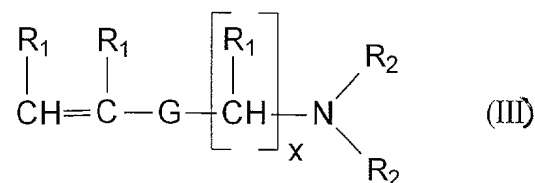

in which


G is a linking group selected from  $-\text{COO}-$ ,  $-\text{OCO}-$ ,  $-\text{CONH}-$ ,  $-\text{NHCO}-$ ,  $-\text{NHCONH}-$ ,  $-\text{NHCOO}-$ ,  $-\text{OCONH}-$  or  $-\text{OCOO}-$ ,

each  $\text{R}_1$  is hydrogen or an alkyl group with 1 to 3 carbon atoms,

each  $\text{R}_2$  is hydrogen or an alkyl group with 1 to 5 carbon atoms, and

x is an integer from 1 to 6.

84. A composition according to claim 83, in which the repeat unit is based on a compound of formula IV.

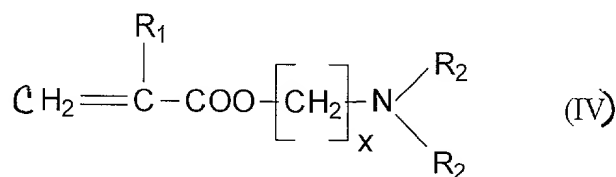

in which



R<sub>1</sub> is hydrogen or an alkyl group with 1 to 3 carbon atoms,

each R<sub>2</sub> is hydrogen or an alkyl group with 1 to 5 carbon atoms, and

x is an integer from 1 to 6.

85. A composition according to claim 78, in which the basic function is an imine.

86. A composition according to claim 78, in which the basic function is a basic aromatic N-containing group.

87. A composition according to claim 86, in which the basic function is a pyridine group.

88. A composition according to claim 86, in which the basic function is an imidazole group.

89. A composition according to claim 80, in which the polymer is derived from chitosan.

90. A composition according to claim 75, in which the specific compound is  $\kappa$ -carrageenan.

91. A composition according to claim 75, in which the solubility of the specific compound increases with decreasing H<sup>+</sup> ion concentration in the surrounding medium.

92. A composition according to claim 91, in which the specific compound is a polymer.


93. A composition according to claim 92, in which the specific compound is a pH-sensitive polymer having at least one repeat unit which is based on a compound having an acid function.

94. A composition according to claim 93, in which the polymer has at least one repeat unit based on a compound selected from the group consisting of vinyl alcohol derivatives, acrylates and alkyl acrylates having said acid function.

95. A composition according to claim 93, in which the polymer is a carbohydrate functionalized with said acid function.

96. A composition according to claim 93, in which the acid function is a carboxyl group.

97. A composition according to claim 96, in which the repeat unit of the polymer is based on a compound of formula V:



5 in which

G is a linking group selected from  $-\text{COO}-$ ,  $-\text{OCO}-$ ,  $-\text{CONH}-$ ,  $-\text{NHCO}-$ ,  $-\text{NHCONH}-$ ,  $-\text{NHCOO}-$ ,  $-\text{OCONH}-$  or  $-\text{OCOO}-$ ,


B is a hydrocarbon group selected from straight or branched-chain, saturated or unsaturated, optionally substituted alkylene, arylene or aralkylene,

10 Ak is hydrogen or an alkyl group, preferably with 1 to 4 carbon atoms,

x, y and z, independently of one another, are either 0 or 1, and

w is an integer from 1 to 3.

98. A composition according to claim 97, in which the repeat unit is based on a compound of formula VI:



5 in which

B is a hydrocarbon group selected from straight or branched-chain, saturated or unsaturated, optionally substituted alkylene, arylene or aralkylene,

Ak is hydrogen or an alkyl group, preferably with 1 to 4 carbon atoms,

y and z, independently of each other, are either 0 to 1, and

10 w is an integer from 1 to 3.

99. A composition according to claim 95, in which the polymer is derived from a polysaccharide by partial esterification of some of its free hydroxyl group with a polycarboxylic acid and/or by partial etherification of some of its free hydroxyl groups with a product obtained by the esterification of one mole of a polycarboxylic acid with  
5 one mole of a polyol.

100. A composition according to claim 52, in which the core or cores comprises at least one material selected from the group consisting of fragrances, disinfectants, pH-indicators, and combination thereof.

101. A composition according to claim 100, in which the core (8; 8') or at least some of the cores (8'') is in the form of an encapsulated liquid.

102. Composition according to claim 100, in which the core (8; 8') or some of the cores (8") is in solid form.

REMARKS

The foregoing Amendment provides a new set of claims, all of which conform in substance to cancelled claims 1-51. This Amendment is not intended to substantially alter the scope of the claims.

Respectfully submitted,

Date: 29 January 2001

Frederick H. Rabin  
Frederick H. Rabin  
Reg. No. 24,488

Fish & Richardson P.C.  
45 Rockefeller Plaza, Suite 2800  
New York, NY 10111  
Telephone: (212) 765-5070  
Facsimile: (212) 258-2291

09/744724

COMPOSITION FOR USE IN A WATER RESERVOIR

The present invention relates to a composition for use in a water tank in the kitchen or sanitary sector.

Such compositions are known in numerous different forms for different applications, e.g. for deliming coffee machines or for cleaning and deliming toilets as an additive to cisterns.

The aim of the invention was to permit the simultaneous charging of substances possibly not completely compatible when used simultaneously and which evolve their functions at different, defined times.

DE-OS 20 65 153 and DE-OS 20 07 413 disclose detergent pellets for use as washing agents, in which it is inter alia provided to combine two components with different functionalities. The structure is formed from a covering or enveloping shell, which is e.g. formed from two shell halves, which comprise a cleaning agent, and a cavity surrounded by the shells and which contains additives such as softeners, brighteners, etc.


British patent 1 390 503 discloses a liquid cleaning agent or detergent which contains capsules, which are insoluble in the composition, but release their content when the composition is diluted with water. This objective is achieved in that the capsules are coated with a substance, which has a poor solubility in water solutions with a high ionic strength, but which is soluble if the ionic strength is reduced by dilution. It is pointed out that this procedure can be used in order to incorporate materials into the liquid cleaning agent, which in the latter are unstable or would produce an instability if added directly. It is also proposed to use this procedure for delaying the release of a specific substance.

US patent 4,082,678 describes a fabric conditioner, which comprises a closed container containing a releasable agent and which is used for making water-insoluble or non-dispersible an inner container located in the first container and which is normally water-soluble or water-dispersible, the inner container containing a fabric conditioner.

Japanese patent applications KOKAI 60-141705, 61-28440, 61-28441, 61-28596,

61-28597 and 61-28598 describe processes for the production of pH-sensitive microcapsules for use in detergents. The pH-sensitive coating is a copolymer of the following monomers:

A) at least one basic monomer of formula I:



in which R is hydrogen or a methyl group and R<sup>1</sup> and R<sup>2</sup> in each case an alkyl group with 1 to 3 carbon atoms and x is an integer from 1 to 4,

B) at least one monomer which is insoluble or difficultly soluble in water and

C) at least one water-soluble monomer.

It is pointed out that the described polymers are insoluble at a pH-value of 9.5 or higher and are soluble at a pH-value of 8.5 or lower. Different ingredients of cleaning agent compositions are described, which can be successfully and usefully coated with the described polymers. The aim of the invention described therein is to protect substances, which only evolve their function during the rinsing process up to the start of the latter and then to release them as immediately as possible. A disadvantage of the solution described in these Japanese patent applications is that the enveloped particles are in direct contact with non-alkaline washing water at the start of the washing cycle, which can give rise to a partial dissolving of the protective covering.

Japanese patent KOKAI 50-77406 discloses a washing aid, which is surrounded by a water-soluble covering or envelope, obtained by mixing polyvinyl acetal dialkyl aminoacetate and at least one organic acid, which is solid at room temperature. This protective envelope is intended to protect the washing aid during the main washing cycle and to release it during rinsing cycles. The described compound reacts to the pH-value change between the main washing cycle and the rinsing cycle. Here again the disadvantage exists of a possible partial dissolving of the protective envelope at the start of the

washing cycle.

European patent applications EP 284 191 A2 and EP 284 334 A2 disclose a water-soluble polymer film for releasing washing additives during the rinsing cycle of washing machines, remaining intact during the normal washing cycle over a range of typical temperatures and rapidly dissolving during the rinsing cycle. These applications point out that the use of pH-sensitive coatings was admittedly known, but that these films are normally also temperature-sensitive, so that they do not remain reliably stable during the different temperatures of the washing cycle. The solution proposed is a pH-dependent material (which undesirably also has a positive, temperature-dependent dissolving behaviour) which is combined with a material having a negative, temperature-dependent dissolving behaviour. This combination is supposed to guarantee that the coatings do not dissolve at the high temperatures at the start of the washing cycle (in particular the very high temperatures occurring in American machines).

European patent application EP 481 547 A1 discloses multilayer dishwashing machine tablets having a core, a separating layer surrounding the core and an outer layer for the sequential release of the ingredients of the different layers. This tablet is fundamentally intended to solve two problems, namely 1) incompatible materials can be formulated together in a single tablet and released at different times in order to avoid mutual influencing and 2) compositions, which are intended to evolve their functions at different times, can be formulated in a single tablet.

An essential disadvantage of this prior art is that for initiating the dissolving of the enveloping layer the temperature and in particular the contact time with the washing solution is used as the triggering factor, which consequently clearly limits the practical usability of the products described.

PCT application WO 95/29982 discloses a dishwashing machine rinsing agent with a delayed release of a clear rinsing agent in the form of a nonionic surfactant, which together with an inorganic builder salt forms a core particle, which is provided with a wax-like covering in order to ensure the delayed release. This covering is a substance which does not melt at the operating temperatures encountered during the cleaning cycle, but which at alkaline pH-values is so gradually chemically disintegrated that there is still an effective clear rinsing agent quantity present at the end of the main cleaning cycle and is transferred into the rinse clear cycle.

It is disadvantageous that the covering is rendered soluble by chemical

saponification at alkaline pH-values, so that the time at which the clear rinsing substance is released from the core is a function both of the temperature and the length of the main cleaning cycle. The patent application contains no teaching as to how a product is to be formulated with which the clear rinsing agent can be released in all washing programs of any machine type only during the rinse clear cycle. Finally the product is a mixture of granular cleaning agents and granular clear rinsing particles.

In view of the prior art described, the problem of the present invention is to provide a composition making it possible to release at different, defined times simultaneously charged products with different functionalities. The aim is to achieve this without significant restriction to the choice of the materials to be combined together.

According to the invention this problem is solved by a composition characterized by a basic composition evolving its function essentially following addition to a first water filling of the water tank, and at least one particle with at least one core comprising at least one substance, which evolves its function substantially after an at least partial emptying of the first water filling from the water tank and the inflow of fresh water thereto, and a covering substantially completely surrounding the core or cores and comprising at least one compound, whose solubility increases with decreasing concentration of a specific ion in the surrounding medium, and agents are provided so that up to the inflow of fresh water a significant dissolving of the covering or a significant detachment of the covering from the core or cores is prevented.

In an advantageous embodiment the concentration of the specific compound in the local environment of the particle or particles up to the inflow of fresh water to the water tank is sufficiently high in order to prevent up to this time a significant dissolving of the covering or a significant detachment of the covering from the core or cores.

Preferably the particle or particles are covered with a substance which, substantially independently of the concentration of the specific compound in the surrounding medium, in the time from the addition of the composition to the water filling of the water tank up to the at least partial emptying thereof from the water tank undergo dissolving or separation.

Preferably the basic composition is in the form of a tablet.

An embodiment of the invention proposes that the at least one particle is placed in or on the tablet in such a way that the concentration of the



specific compound in the local environment of the particle or particles up to the substantially complete dissolving of the tablet is sufficiently high to prevent a significant dissolving of the covering or a significant detachment of the covering from the core or cores.

In particularly preferred manner the or all the particles are received in at least one tablet cavity completely surrounded by the basic composition.

The at least one cavity contains one or more particles which, alone or together, have substantially the same volume as the cavity.

Preferably the at least one cavity has a larger volume than the or all the particles received in the particular cavity.

In an alternative of the invention the particle or particles are loosely placed in the interior of the cavity.

In another alternative the particle or particles are fixed in the interior of the cavity, preferably by an adhesive.

In another embodiment the cavity is substantially centrally placed in the interior of the tablet.

The invention also proposes that the tablet has a single, substantially spherical cavity.

According to the invention the cavity receives a single, substantially spherical particle, whose external diameter is smaller than the internal diameter of the cavity.

In another embodiment the or all the particles are received in at least one tablet cavity only partly surrounded by the basic composition.

Preferably the cavity is a depression in one of the surfaces of the tablet in which the particle or particles are at least partly received.

In a preferred embodiment the particle or particles are so received in the cavity or depression that they do not project over the surface or surfaces of the tablet.

The invention proposes in a special embodiment that the cavity or depression only contains a single particle, whose volume and shape in the vicinity of the cavity or depression coincides to a significant extent with the volume

and shape of the cavity or depression and substantially completely fills the same.

Preferably the cavity or depression parallel to one of the surfaces to which it opens or in which it is placed has a substantially circular cross-sectional shape.

The invention also proposes that the cavity or depression only opens to the surface or surfaces to the extent that the particle or particles received therein cannot pass through the opening or openings of the cavity or depression.

According to the invention it is preferable for the particle or particles to be loosely arranged in the cavity or depression.

According to another alternative the particle or particles are fixed in a cavity or in the depression.

According to an embodiment of the invention the particle or particles are fixed in a cavity or in the depression with an adhesive.

In a preferred embodiment of the invention the covering comprises at least one compound which, at the concentration of the specific compound prior to the inflow of fresh water, is not or is only slightly soluble and at the concentration of the specific compound following the inflow of an adequate fresh water quantity has an adequate solubility such that it is so significantly dissolved or detached from the core or cores that an at least partial escape of the core material into the surrounding medium is made possible.

Preferably the solubility of the compound increases with decreasing OH<sup>-</sup> ionic concentration and therefore decreasing pH-value in the surrounding medium.

Preferably the compound comprises a polymer.


It is preferable for the compound to comprise a pH-sensitive polymer, which comprises at least one repeat unit, which has at least one basic function not forming part of the polymer backbone chain.

In a preferred embodiment the polymer comprises at least one repeat unit based on a compound chosen from the group consisting of vinyl alcohol derivatives, acrylates or alkyl acrylates having said basic function.

According to the invention the polymer is a carbohydrate functionalized with said basic function.


The aforementioned basic function is preferably an amine, in particularly preferred manner a secondary or tertiary amine.

In a preferred alternative the repeat unit is based on a compound having the following formula III:

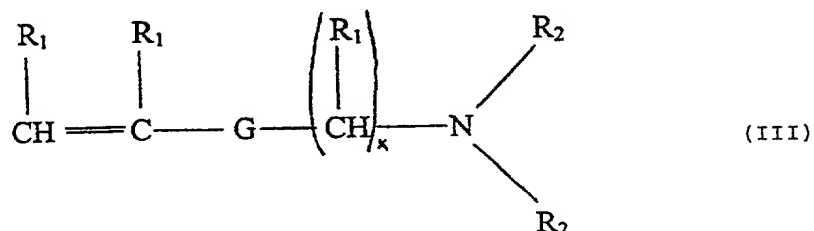

in which G is a linking group selected from -COO-, -OCO-, -NHCO-, -NHCONH-, -NHCOO-, -OCONH- or -OCOO-, R<sub>1</sub> independently of one another being hydrogen or an alkyl group with 1 to 3 carbon atoms, R<sub>2</sub> independently of one another hydrogen or an alkyl group with 1 to 5 carbon atoms and x is an integer from 1 to 6.

Preferably the repeat unit is based on a compound with the following formula IV:

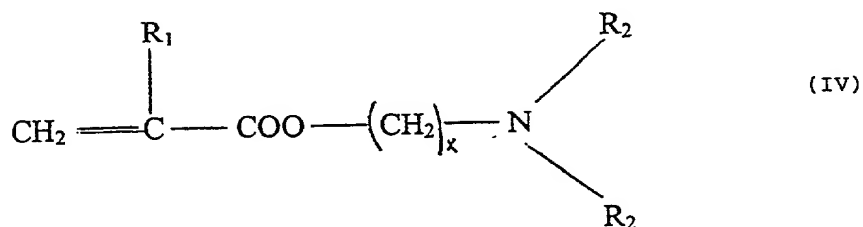

in which  $R_1$  independently of one another is hydrogen or an alkyl group with 1 to 3 carbon atoms,  $R_2$  independently of one another hydrogen or an alkyl group with 1 to 5 carbon atoms and x is an integer from 1 to 6.

According to another embodiment of the invention the basic function is an imine or a basic, aromatic N-containing group, preferably a pyridine group or an imidazole group.

According to a further embodiment the pH-sensitive polymer is a polymer derived from chitosan.

The invention finally proposes that the compound comprises K-carrageenan.

According to the invention the solubility of the compound increases with decreasing  $H^+$  ionic concentration and therefore increasing pH-value in the surrounding medium.

The compound preferably comprises a polymer.


According to an embodiment of the invention the compound comprises a pH-value-sensitive polymer, which comprises at least one repeat unit, which is based on a compound comprising an acid function.

According to an alternative the polymer comprises at least one repeat unit, which is based on a compound selected from the group comprising vinyl alcohol derivatives, acrylates or alkyl acrylates comprising said acid function.

The polymer is preferably a carbohydrate functionalized with said acid function.


In particularly preferred manner the acid function is a carboxyl group.

According to an alternative the repeat unit is based on a compound with the following formula V:



in which G is a link group selected from -COO-, -OCO-, -CONH-, -NHCO-, -NHCONH-, -NHCOO-, -OCONH- or -OCCO-, B independently of one another a hydrocarbon group selected from straight or branched, saturated or unsaturated, optionally substituted alkylene, arylene or aralkylene, Ak is hydrogen or an alkyl group, preferably with 1 to 4 carbon atoms, x, y and z independently of one another are either 0 or 1 and w is an integer from 1 to 3.

The repeat unit is preferably based on a compound with the following formula VI:



in which B independently of one another is a hydrocarbon group selected from straight or branched, saturated or unsaturated, optionally substituted alkylene, arylene or aralkylene, Ak is hydrogen or an alkyl group, preferably with 1 to 4 carbon atoms, y and z independently of one another are either 0 or 1 and w is an integer from 1 to 3.

Preferably the pH-sensitive polymer is derived from a polysaccharide by partial esterification of some of its free hydroxyl groups with a polycarboxylic acid and/or by partial etherification of some of its free hydroxyl groups with a product obtained by esterifying one mole of a polycarboxylic acid with 1 mole of a polyol.

According to the invention the core or cores comprise at least one material selected from the group consisting of fragrances, disinfectants and pH-indicators.

According to an embodiment of the invention the core or at least part of the cores is in the form of an encapsulated liquid.

In particularly preferred manner the core or at least a part of the cores is

in a solid form.

The composition according to the invention is characterized in that it solves the set problem with excellent results. The basic composition in the form of a tablet is dissolved following addition to the water filling of the water tank and can evolve its corresponding, intended action (cleaning, deliming, etc.). The particle located in or on the tablet contains as the core material that substance or substances evolving their main function only after an at least partial emptying of the water tank and the inflow of fresh water. The most varied substances can be used, e.g. fragrances, disinfectants, pH-indicators, etc.

Said substance or substances are protected by a covering, which at the ionic concentration, e.g. the pH-value and optionally the temperature of the first water filling of the water tank are stable and do not or do not significantly dissolve or become detached. Only when there is a significant drop in the ionic concentration or the pH-value through an at least partial emptying of the water tank and the inflow of fresh water, i.e. by dilution, is the solubility of the covering material reduced to such an extent that it rapidly dissolves or becomes detached and the actual active core material is released into the surrounding medium.

As an alternative to the tablet form of the basic composition used in preferred manner, it is possible to use other administration forms which are covered by the protective scope of the invention. Thus, the particles with the covering varying its solubility in response to a change in the concentration of the specific compound can be joined by a granulation or similar process to the basic composition, e.g. enveloped. In order to ensure for this embodiment an optionally desired, reduced contact between covering and basic composition, the particles can be surrounded by a further protective jacket, which e.g. comprises a compound soluble in water independently of the concentration of the specific compound. With this embodiment, during the time between the addition of the composition to the water tank and the at least partial emptying thereof and the inflow of fresh water, initially the basic composition and protective jacket of the particles are dissolved and once again the particles protected with the covering according to the invention are left behind.

Provided that charging does not take place by special charging or dosing aids, which can hold back the particles according to the invention, the particles according to the invention should be sufficiently large to ensure that during the emptying of the water tank they are not discharged to a significant extent.

The invention is described in greater detail relative to the following examples and the drawings, wherein show:

- Fig. 1            A first embodiment of the composition according to the invention in cross-section.
- Fig. 2            A second embodiment of the composition according to the invention in cross-section.
- Fig. 3            A third embodiment of the composition according to the invention in cross-section.
- Figs. 4a & b      A fourth embodiment of the composition according to the invention in cross-section and in plan view.
- Fig. 5            A fifth embodiment of the composition according to the invention in cross-section.

Figs. 1 to 5 show possible embodiments of the composition according to the invention. In all cases the preferred tablet form is chosen for illustration.

Fig. 1 shows a tablet 1 comprising two half-tablets 2 and 3, which can have the same or a different composition.

Roughly centrally in both half-tablets it is possible to see a roughly hemispherical recess 4 or 5 which, when the tablet 1 is joined together, gives a roughly spherical cavity.

In the represented embodiment, in said cavity is placed a single particle 6 comprising the core 8 and the pH or ionic concentration-sensitive covering 9, whose external diameter is slightly smaller than the internal diameter of the cavity in the tablet. In another embodiment of the invention particles 6 can fill substantially the complete tablet cavity and engage on the walls thereof. If the internal diameter of the cavity is slightly larger than the external diameter of the particle 6, the latter can either be loosely received in the cavity or fixed by an adhesive applied in the gap.

In the embodiment where contact between the particle and the basic composition surrounding it is reduced or completely prevented, the additional advantage is that during production processes, e.g. the moulding of the individual constituents in successive stages, a deformation and a possibly resulting damage to the core or cores and/or the covering is reliably avoided

and which could have led to a reduction in the protective action of the covering of the core or cores. By preventing any pressure being exerted on the particle during any phase of the production process, it is also possible to reliably prevent that with specific core compositions there is any "bleeding" thereof into the material of the covering and basic composition. Finally, for certain compositions of the covering 9 and/or basic composition 2, 3 it can be advantageous to avoid an intimate, full-surface contact, because otherwise undesired reactions could arise in the boundary layers.

In a preferred embodiment of the invention the surface of the particle is at the most in partial direct contact with the surface of the basic tablet composition surrounding it. This can take place in the ways specifically described in the application and in any other way achieving the sought objective. Examples are the loose placing of a smaller particle in a larger cavity, the fixing of a smaller particle in the larger cavity in such a way that there is little or only a partial contact between the particle and the basic composition, the application of a protective coating to the core covering according to the invention, etc.

The term "local environment", as used in conjunction with the inventive particles, is intended to indicate the direct environment around said particles. The concentration of the specific compound of said local environment of the particle is the determinative factor for its stability. In the preferred embodiments in tablet form this concentration in the local environment of the particle is determined at least up to the substantially complete dissolving of the tablet by the molecule passing into solution therefrom. Preferably the origin of the "specific compound", at least in an initial phase following the addition of the water filling to the water tank, is a compound from the tablet-forming basic composition or is produced by the same in the surrounding medium. In the most typical case this involves  $\text{OH}^-$  ions (for basic cleaning agents) or  $\text{OH}^+$  ions (for acid deliming agents), whose concentration can in both cases be expressed as the pH-value.

For fixing the particle in the cavity it is obviously not only possible to use a conventional adhesive, but also other compositions and agents fulfilling the same function, e.g. a mechanical fixing such as e.g. adequate frictional engagement between tablet and particle at at least certain points or a plug connection between tablet and particle. Fixing agents between the



particle and tablet can also be constituted by compounds which optionally melt or dissolve at the temperature of the first water filling.

Obviously the most varied further geometrical shapes, such as e.g. ellipsoid, cylinder, etc. are possible for the design of the cavity in the tablet or the particle received therein. The design and size of the tablet cavity and that of the particle received therein need not correspond with one another. Thus, e.g. a spherical cavity can receive a cylindrical particle. All possible further combination possibilities are conceivable within the scope of the present invention. It is also possible to fill the cavity with several smaller particles instead of a single particle.

Fig. 2 shows a second embodiment of the inventive composition based on a two-layer tablet 1. In this case the upper half-tablet 3 comprises two parts, which make available both an adequate cavity 5 for receiving the particle 6 and an opening to the tablet side 11. Thus, in this case the particle 6 is not completely surrounded by the basic composition of the tablet 1, so that it is visible from the outside in the interior of tablet 1. Here again the particle can either be loosely received in the cavity 5 (provided that it is ensured by a corresponding choice of the size of the particle 6 on the one hand and the size of the opening of the cavity 5 towards tablet side 11 on the other that the particle or particles in the cavity cannot pass through the opening) or can be fixed in the interior of the cavity 5 by a corresponding agent, such as e.g. an adhesive.

Fig. 3 gives a third possible embodiment. The basis for this is a tablet 1', which has a uniform structure, i.e. formed by a single layer 2' with a uniform composition and colour. By means of a suitable device a depression 4' is formed in said layer 2'. Into said depression 4' is introduced the particle 6' and in this case is fixed in the depression, because the depression is open to the side 11' of the tablet 1' to such an extent that without any fixing it would be possible for the particle to drop out of the depression and fixing takes place by an adhesive 10' or a fixing intermediate layer or mechanically (e.g. by frictional engagement). This principle can obviously also be transferred to multilayer tablets.

Here-again-the most varied geometrical configurations are possible. Thus, the depression can e.g. have a substantially circular cross-section parallel to the side 11'. However, a random number of other cross-sections is also conceivable, e.g. any random polygon. The particle 6' received in the depression 4', as in the embodiment according to fig. 3, can assume any random shape (independent of the shape of the depression 4'), such as e.g. an ellipsoid, cylinder, parallelepiped, etc.

Consideration can also be given to the fixing of the particle 6' in a cavity open at both sides, such as e.g. in a cylindrical hole 4' passing through the tablet body 1' in which is fixed a corresponding, cylindrical particle 6' (figs. 4a and b).

Fig. 5 gives another possible embodiment. This is essentially constructed in the same way as the embodiment according to fig. 3, i.e. a tablet 1', which has a uniform construction, i.e. only a single layer 2' and has a uniform composition and colour. In the present case the particle 6" has in place of a single core (as in fig. 3), numerous cores 8", which are all embedded in a covering 9". In this embodiment it is e.g. also possible to incorporate cores with a different composition and different shape (encapsulated material or solid cores) in one particle 6".

#### Example 1

##### Production of the core

###### a. Core for a particle for the controlled release of a fragrance

Oxidizing cleaning agents used in the sanitary sector as additives to toilet cisterns, greatly restrict the choice of fragrances usable in these compositions. The release of the fragrance only at a time when the cleaning agent has substantially been removed through the running out of the water filling of the cistern permits a much greater flexibility in the use and development of fragrances.

Thus, with the composition according to the invention it is possible for the

first-time-to combine fragrances with the cleaning agent, which would ~~not~~ otherwise be compatible. The tablet comprising the oxidizing cleaning agent dissolves on addition to the cistern, which releases the particle according to the invention located on or in the tablet and whose covering prevents the fragrance from being released and therefore attacked by the cleaning agent. When the cistern is emptied, i.e. the water filling mixed with the oxidizing cleaning agent flows therefrom into the toilet bowl in order to fulfil its function there, new water flows in and through the dilution, i.e. the lower pH-value "triggers" the dissolving and detachment of the particle according to the invention and therefore releases the fragrance-containing core, which can now evolve its action in the cistern and during the first outflow into the toilet bowl.

For example, such a fragrance-containing core can be produced in that a molten mixture of 50% melted PEG 8000, 25% fragrance and 25% diethyl phthalate is cooled, in order to give e.g. a spherical particle with a weight of e.g. 0.75 g.

b. Core for a particle for the controlled release of a disinfectant

The optimum bactericidal action of a disinfectant such as benzalkonium chloride is obtained under neutral or alkaline conditions. Thus, if benzalkonium chloride is used in acid cleaning agents (for deliming) its efficiency is below the optimum.

In the case of the composition according to the invention an acid cleaner tablet for dosing into a toilet cistern can be combined with a particle according to the invention, whose core contains benzalkonium chloride as the disinfectant. On adding to the cistern the tablet dissolves and the inventive particle is released, its covering preventing the release of the disinfectant in the acid medium in question. As soon as the cistern is emptied in order to allow the acid cleaning liquor to drain into the toilet bowl so that it can evolve its action, through the inflowing fresh water the dissolving or detachment of the covering of the particle left behind in the cistern is "triggered", so that the content can be released from its core and can evolve its optimum action under the given neutral conditions.

A corresponding core for such a particle can e.g. be produced in that a molten mixture of 98% melted benzalkonium chloride and 2% blue dye is cooled in order to form a particle weighing e.g. 0.64 g.

c. Production of a particle for the release of a pH-indicator

If coffee machines are treated with an acid composition (for deliming purposes), it is not possible to readily establish whether the acid used has completely been rinsed out following the treatment. Through the use of an acid tablet with a core containing a pH-indicator, which is only released in the case of adequate dilution, the implementation of such a function would become possible.

Such a core particle could e.g. comprise 1 g of a mixture consisting of 99.7% sodium chloride and 0.3% of a corresponding indicator (e.g. methyl orange or bromocresol green).

Example 2

Screening process for covering materials

As stated hereinbefore, it is of great importance for the present invention that the material for the covering of the particle core or cores comprises the substance or substances evolving their function essentially only after an at least partial emptying of the water tank and the inflow of fresh water, only has a solubility which is dependent on the concentration of a specific, selected ion. In this way the covering is substantially insoluble in that water filling of the water tank, whose concentration is determined by the dissolving of the tablet, and is made soluble and is detached from the particle if the concentration drops following an at least partial emptying of the water tank and the inflow of fresh water.

It has been observed that the dilution, due to the at least partial draining of the water filling of the water tank with dissolved tablet and the inflow of fresh water, reduces the concentration 10 to 100 times, i.e. for example raises or lowers the pH-value by 1 to 2 units.

On the basis of this observation processes have been developed for the screening of the suitability of different polymers for their use as covering or enveloping materials, which comprises the determination of the solubility of such polymers at two different concentrations, which differ by at least 10 and preferably 100 times.

The concentration values to be used during polymer screening are dependent on the formulation of the basic composition of the tablet into which the enveloped or covered particle is to be incorporated.

The value for the highest concentration used for the screening process should correspond to the concentration of the selected ion, which is encountered in the first filling of the water tank, after the basic composition of the tablet has completely dissolved. When this concentration has been determined the lower values for the concentration should be fixed at 10 to 100 times below this higher value.

On the basis of this information it falls within the routine capacity and knowledge of an expert in this field to determine the concentration values of the test solutions to be used in the testing processes described hereinafter.

#### Process for the preparation of the test solution and for performing and evaluating the tests

The materials to be tested are dissolved in solvents in which they are readily soluble. The solutions are spread over glass plates, then dried at room temperature until they have a constant weight.

At a controlled temperature the glass plates are placed in a beaker with the test solution. The solution is then stirred with a magnetic stirrer at a controlled stirring rate. After about 10 minutes the glass plates are removed from the beaker and dried at room temperature to a constant weight. The results are expressed as a weight loss (%).

Obviously the screening processes must be adapted to the basic composition, because this exercises the essential influence on the concentration or pH-profile in the water tank. The aim in all cases is to check the degree of solubility of the corresponding materials at different states, namely high or low concentration or pH-values.

On the basis of this information it falls within the routine capacity of an expert in this field to provide the specific test parameters for the screening. For example hereinafter two screening processes are described with which some of the possible materials for the covering of the particle according to the invention were tested.

#### Screening process 1

Screening process 1A was performed with buffer solutions as the medium for

simulating an alkaline medium. To this end two buffer solutions were prepared in the following way:

Stock solution: ,                   7.507 glycine buffer (Merck 104169)  
                                  5.850 g NaCl  
                                  topped up with water to 1000 ml

pH 8-buffer solution:               500 ml stock solution  
                                  500 ml distilled H<sub>2</sub>O  
                                  1.23 g 1 N NaOH

pH 10-buffer solution:              500 ml stock solution  
                                  500 ml distilled H<sub>2</sub>O  
                                  32.6 g 1 N NaOH.

Screening process 1B was performed with buffer solutions as the medium for simulating an acid medium. For this purpose use was made of two buffer solutions commercially available from Merck, namely a citrate/HCl buffer solution with a pH-value of 3 and a citrate/NaOH buffer solution with a pH-value of 6.

### Screening process 2

Screening processes 2A and 2B were performed with the following basic composition formulations, in order to simulate corresponding conditions in a water tank, e.g. a toilet cistern.

The corresponding compositions were dissolved in water with 17% dH with the two different concentrations 2 g/l and 0.02 g/l.

### Screening process 2A

#### Alkaline formulation:

<u>Ingredient</u>	<u>wt. %</u>
Sodium perborate monohydrate	9.00
Sodium tripolyphosphate	48.00
Sodium carbonate	28.00
Polyethylene glycol	4.00
Polymer	1.50
TAED	3.00
Enzymes	1.50
Surfactant	3.50
Additives	1.50
Total	100.00

### Screening process 2B

#### Acid formulation:

<u>Ingredient</u>	<u>wt. %</u>
Amidosulphuric acid	56
Maleic acid	24
Sodium bicarbonate	20

### Screening process 3

Screening process 3 is used for screening for compounds, whose solubility changes as a function of the concentration of potassium ions. The compounds found with such a screening process can be used if in the water tank, as described above, there is a correspondingly high potassium ion concentration and which is to be correspondingly reduced by the inflow of fresh water.

Screening process 3 was performed with the following formulation in order to simulate corresponding conditions.

### Formulation:


<u>Ingredient</u>	<u>wt. %</u>
Potassium triphosphate	13.6
Potassium bicarbonate	34.0
Potassium sulphate	23.1
Potassium chloride	12.4
Potassium carbonate	9.7
Boric acid	2.0
Sodium perborate monohydrate	2.0
TAED	1.0
Paraffin	1.0
Protease	0.2

### Example 3

#### Choice of materials for covering the particles

Using the screening process described in example 2 different materials were tested for their suitability as a covering for the particles according to the present invention. One of these materials, hereinafter called "Polymer 1" is a polymer as described in Japanese patent application KOKAI 61-28440, i.e. a polymer of general formula II with  $1/(1+m+n) = 0.35$ ;  $m/(1+m+n) = 0.45$ ;  $1+m+n = 1500-1800$ .



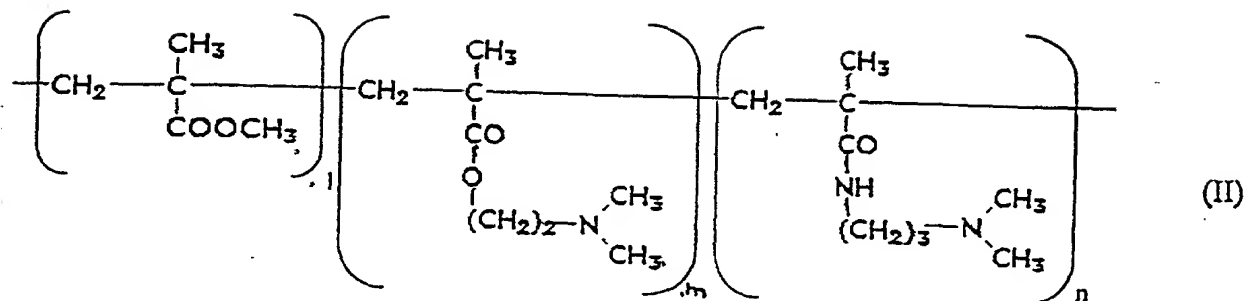

The polymer was produced in conventional manner by bulk polymerization. The screening test results were as follows:


Screening process 1A:

Films of polymer 1 were produced from a 10% solution in isopropanol.

pH-value of buffer solution	weight loss at 30°C [%]
10	7-8
8	81-88


Screening process 2A gave similar good results.

The invention is obviously not restricted to this exemplified polymer and naturally there is a considerable variation possibility with respect to the polymers mentioned in Japanese patent applications KOKAI 60-141705, 61-28440, 61-28441, 61-28596, 61-28597 and 61-28598 or can be extended to compounds of formula IV:

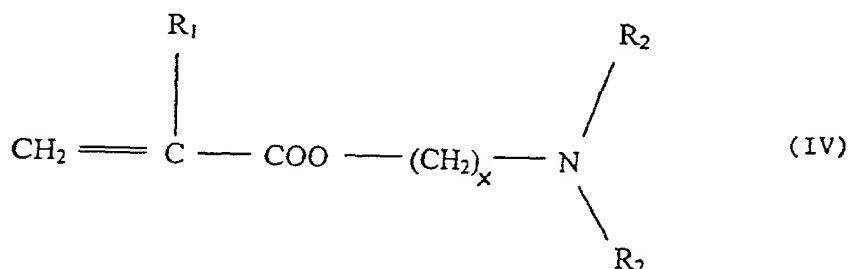


in which  $\text{R}_1$  independently of one another is hydrogen or an alkyl group with 1 to 3 carbon atoms,  $\text{R}_2$  independently of one another hydrogen or an alkyl group with 1 to 5 carbon atoms and  $x$  is an integer from 1 to 6.


Moreover, within the larger class of compounds according to formula III:

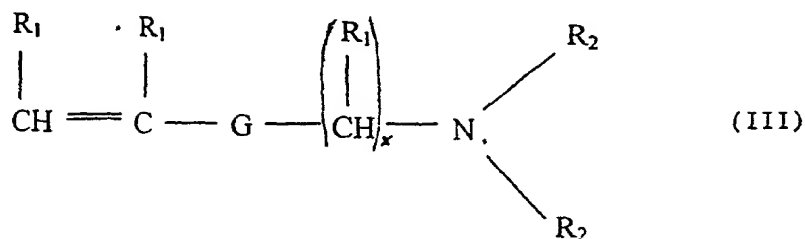

in which G is a link group selected from -COO-, -OCO-, -CONH-, -NHCO-, -NHCONH-, -NHCOO-, -OCONH- or -OCCO-,  $R_1$  independently of one another is hydrogen or an alkyl group with 1 to 5 carbon atoms and x is an integer from 1 to 6, in exemplified manner it is possible to use polymers with a repeat unit based on a compound of formula VII:

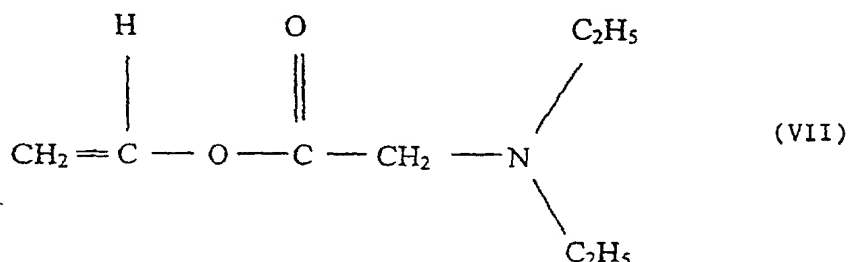

e.g. a pH-sensitive polymer ("Polymer 2") with the repeat unit VIII commercially obtainable under the trademark AEA<sup>(R)</sup> from SANKYO:

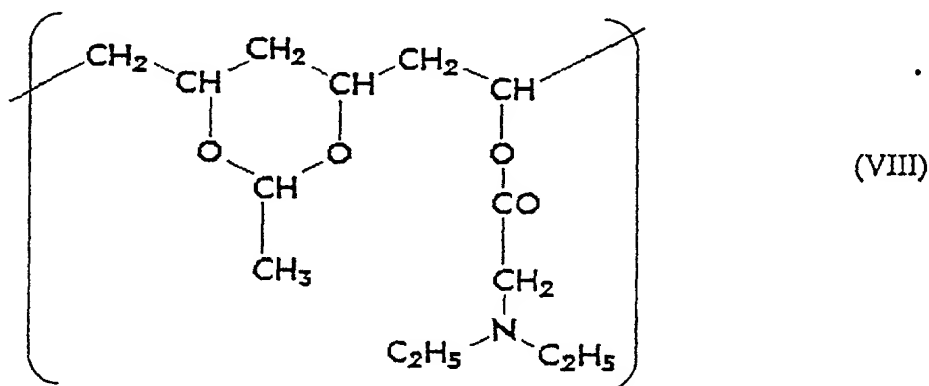


The above-described screening process 2A was also performed with "Polymer 2".

15 g of "Polymer 2" and 5 g of Mowiol<sup>(R)</sup> 3-98 (Clariant) were dissolved in

200 ml of a mixture of water/ethanol/1N HCl 12:8:1. Films were formed and tested in the manner described hereinbefore. The results were comparable with those of "Polymer 1".


Further polymers having the desired characteristics or which can be simply modified so as to make them suitable for the purposes of the present invention, are polymers of isomers or derivatives of pyridine, preferably copolymers with styrene or acrylonitrile, having the following formulas IX and X. which G is a substituent at a random point of the pyridine ring:

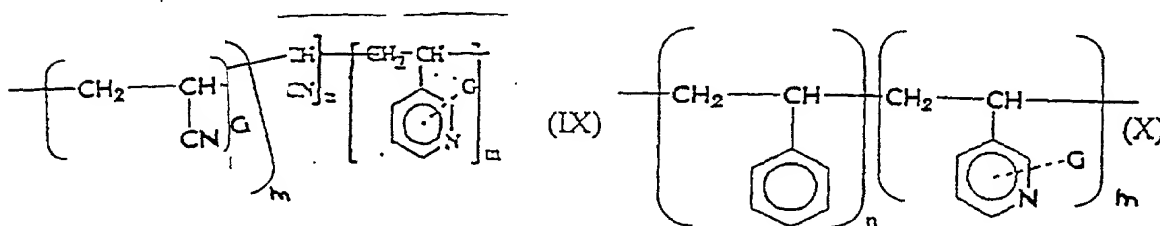

A polymer according to the above formula X, namely poly(4-vinylpyridine-styrene) copolymer (Scientific Polymer Products Inc.), namely "Polymer 3" was tested in accordance with the above-described screening process 2A.


10 g of "Polymer 3" were dissolved in 230 ml of water/1N HCl 6.25:1. The formation of films and the performance of the tests were as described hereinbefore. The results were comparable with those for "Polymer 1" and "Polymer 2".

Further polymers are (e.g. random) polymers derived from chitosan, based on the following monomer units XI and XII:

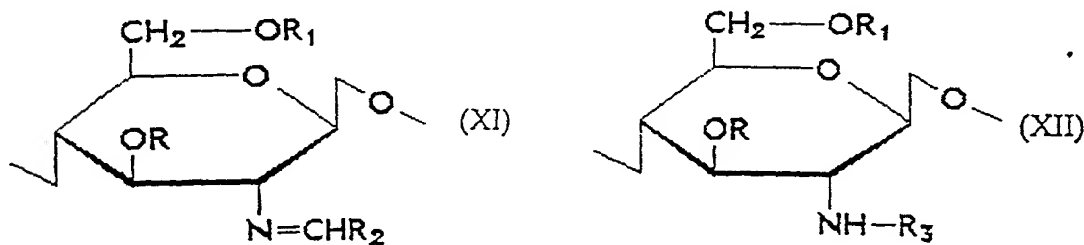


In the case where there is a pH-value change from acid to neutral, the following exemplified specific polymers proved suitable in screening processes 1B and 2B:


1. Polyvinyl acetatophthalate

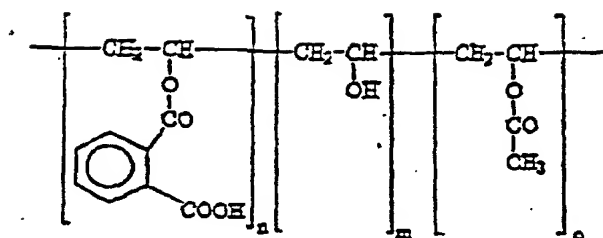


2. Hydroxylpropyl cellulose phthalate

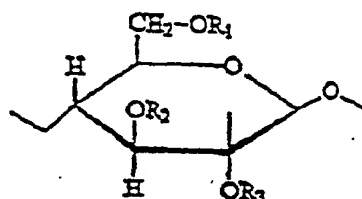

in which  $R_1$ ,  $R_2$  and  $R_3$  are selected independently of one another from the group comprising methyl, ethyl, carboxymethyl, hydroxyethyl, acetyl,

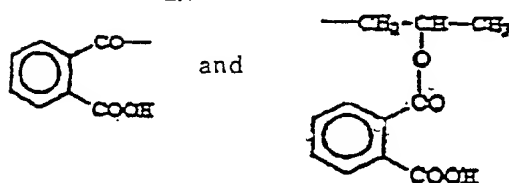


3. Acrylic acid/ethyl acrylate copolymer



It is possible to use in the covering of the core material substances or substance mixtures which, with respect to their solubility behaviour, react to a change in the ionic concentration, i.e. ionic concentration-sensitive polymers. It is e.g. possible to use the partly hydrolyzed polyvinyl acetates (commercially available under the trade name Mowiol<sup>(R)</sup> - Clariant) described in EP 284 191 A2 and EP 284 334 A2, which have a corresponding ionic concentration dependence in the presence of borates due to the

complexing of the borates with polyols. Initial successful tests were carried out with Mowiol® 56-88.

Another ionic concentration-sensitive polymer is the polysaccharide K-carrageenan, which was proved in screening process 3 (cf. example 2) to be a polymer whose solubility is dependent on the potassium ion concentration in the surrounding medium. As shown, K-carrageenan has the following formula XI:

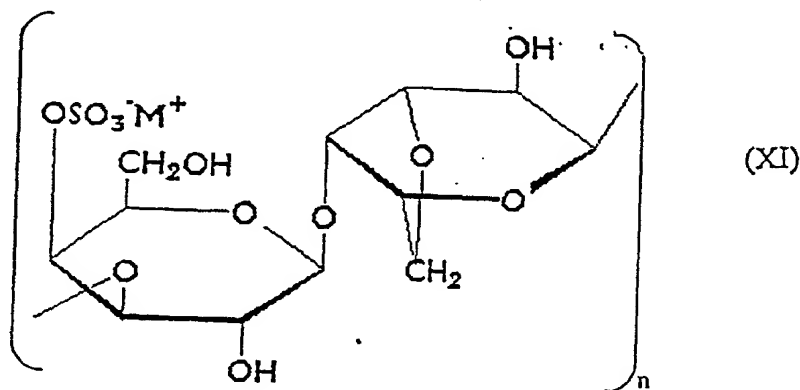

This polymer, called "polymer 4", was tested in accordance with the above-described screening process 3.

4 g of K-carrageenan were dissolved in 96 g of water. 10 g of Mowiol® 18-88 were dissolved in 90 g of water and both solutions were mixed. The resulting solution was used for forming films and performing tests, in the manner described hereinbefore. The following results were obtained:

Cleaning agent concentration	Weight loss at 30°C [%]
4 g/l	0.5 - 3.0
0.02 g/l	24.5 - 25.0

The above list of compounds suitable for the covering according to the invention is obviously non-exhaustive. Further polymers changing their solubility by modifying the pH-value or ionic concentration in the desired range, are conceivable or can be developed and are consequently covered by the protective scope of the present invention. Inter alia for the covering according to the invention it is also possible to use compounds which, with respect to their solubility behaviour react to a change in the concentration of nonionic compounds in the surrounding medium. In addition, substances suitable for the covering according to the invention are not limited to polymeric compounds, although such compounds are described here as preferred embodiments.

With the aid of the aforementioned screening processes or those adapted to the measurement of an ionic concentration sensitivity, various other commercially available materials or materials obtainable by simple modifications, can be investigated for their suitability in the present invention. The choice of such polymers is a problem easily solvable by the average expert in view of the clear aims and the indicated screening processes.

#### Example 4

##### Production of a particle according to the invention

The different cores described in example 1 were used as a basis for the production of particles according to the invention. The cores were provided individually or in a plurality (fig. 5) with a covering in an apparatus for applying a film coating of the type known from the pharmaceutical industry (e.g. Lödige, Hüttlin, GS, Manesty and Driam).

In cases where the core or cores have an ingredient with a certain incompatibility with the material of the covering, said core or cores can be provided with a protective coating prior to the application of said covering. It is possible to use various prior art materials for this purpose, such as e.g. cellulose, cellulose derivatives, polyvinyl alcohol, polyvinyl alcohol derivatives and mixtures thereof. When using the cores of example 1, for 1a use was made of a protective coating and preferably use was made of a 10 wt.% aqueous solution of a polyvinyl alcohol, e.g. Mowiol<sup>(R)</sup> 5-88 (Clariant). The applied coating quantity can be varied and correspondingly adapted by the expert as a function of the core composition. The cores produced in examples 1b and 1c were directly provided with the covering according to the invention without any additional protective coating.

The covering can be applied to the core or cores or protective coating in any random quantity and thickness, provided that it is ensured that when fresh water flows in the covering sufficiently rapidly dissolves or becomes detached, so that the substance contained in the core or cores can evolve its action. In a preferred embodiment to the cores were applied 1 to 10, preferably 4 to 8 wt.% of the concentration-sensitive covering

material-(solids), based on the total particle weight.

Example 5

Production of tablets according to the invention

a. Production of a tablet for use in a coffee machine

A two-layer tablet suitable for receiving an inventively covered particle in accordance with examples 1c and 4 in a cavity formed in the tablet, can be produced by moulding the pulverulent ingredients in machines known from the prior art and using operating parameters known from the prior art. One possible shape of such a tablet is a parallelepipedic tablet formed from two substantially identically thick layers, a hemispherical recess being formed in the large face of each of these layers, so that on joining together the two half-tablets a substantially spherical cavity is formed in the interior (cf. fig. 1).

The tablet composition can be gathered from the following table 2, both half-tablets being produced with the same composition by compression under a pressure of approximately  $900 \text{ kg/cm}^2$ .

Table 2

Ingredient	wt. %
Amidosulphuric acid	56
Maleic acid	24
Sodium bicarbonate	20

The total weight of the two half-tablets together is e.g. 20 g. The cavity resulting from the joining together of the half-tablets should have an internal diameter larger than the external diameter of the particle according to the invention.

The particle produced according to examples 1c and 4 was introduced into the

hemispherical recess of one of the two half-tablets. This was followed by the application of a fixing substance, e.g. an adhesive (e.g. polyethylene glycol, polyvinyl ether, polyvinyl alcohol, silicate, preferably melted PEG 4000) to the corresponding face of the half-tablet and then the second half-tablet is pressed onto the first.

b. Producing a tablet for use in a toilet cistern

A two-layer tablet suitable for receiving an inventively covered particle according to examples 1a and 4 in a cavity formed in the tablet, can be produced by moulding the pulverulent ingredients substantially in accordance with examples 5a.

The composition of the tablet can be gathered from the following table 3, both half-tablets being produced with the same composition by compression under a pressure of approximately  $800 \text{ kg/cm}^2$ .

Table 3

Ingredient	wt. %
Sodium tripolyphosphate	20.0
Sodium carbonate	10.0
Sodium bicarbonate	20.0
Trisodium NTA	8.0
Sodium metasilicate	20.0
Sodium sulphate	8.0
Sodium dichloroisocyanurate	8.0
Polymer	1.5
Nonionic surfactant	4.5

The total weight of the two half-tablets together is e.g. 23 g.

c. Producing a tablet for use in a toilet cistern

A two-layer tablet suitable for receiving an inventively covered particle



according to examples 1a and 4 in a cavity formed in the tablet, can be produced by moulding the pulverulent ingredients substantially in accordance with example 5a. The tablet composition can be gathered from the following table 4.

Table 4

Ingredient	wt. %
Potassium triphosphate	13.6
Potassium bicarbonate	34.0
Potassium sulphate	23.1
Potassium chloride	12.4
Potassium carbonate	9.7
Boric acid	2.0
Sodium perborate monohydrate	2.0
TAED	1.0
Paraffin	1.0
Protease	0.2

d. Producing a tablet for use in a toilet cistern

A two-layer tablet suitable for receiving an inventively covered particle according to examples 1b and 4 in a cavity formed in the tablet, can be produced by moulding the pulverulent ingredient substantially in accordance with example 5a.

The tablet composition can be gathered from the following table 5, the two half-tablets being produced with the same composition by compression under a pressure of approximately 900 kg/cm<sup>2</sup>.

Table-5 —

Ingredient	wt. %
Amidosulphuric acid	56
Maleic acid	24
Sodium bicarbonate	20

The total weight of the two half-tablets together is e.g. 20 g.

The features of the invention disclosed in the description, claims and drawings can be essential to the implementation of the different embodiments of the invention, either singly or in random combination.

CLAIMS

1. Composition for use in a water tank in the kitchen or sanitary sector, characterized by ,

- a basic composition (2, 3; 2') essentially evolving its function following addition to a first water filling of the water tank and
- at least one particle (6; 6'; 6'') with
  - at least one core (8; 8'; 8'') comprising at least one substance evolving its function essentially after an at least partial emptying of the first water filling from the water tank and the inflow of fresh water and
  - a covering (9; 9'; 9'') substantially completely surrounding the core or cores and comprising at least one compound, whose solubility increases with decreasing concentration of a specific compound in the surrounding medium,

agents being provided to prevent up to the inflow of fresh water to the water tank a significant dissolving of the covering (9; 9'; 9'') or a significant detachment of the covering (9; 9'; 9'') from the core (8; 8') or cores (8'').

2. Composition according to claim 1, characterized in that the concentration of the specific compound in the local environment of the particle or particles (6; 6'; 6'') up to the inflow of fresh water to the water tank is sufficiently high to prevent up to this time a significant dissolving of the covering (9; 9'; 9'') or a significant detachment of the covering (9; 9'; 9'') from the core (8; 8') or the cores (8'').

3. Composition according to claim 2, characterized in that the particle or particles (6; 6'; 6'') are coated with a substance which, substantially independently of the concentration of the specific compound in the surrounding medium, dissolves or separates in the period from the addition of the composition to the water filling of the water tank up to the at least partial emptying thereof from the water tank.

4. Composition according to one of the claims 1 to 3, characterized in that the basic composition is in the form of a tablet (1; 1').

5. Composition according to claim 4, characterized in that the at least one particle (6; 6'; 6'') is placed in or on the tablet (1; 1') in such a way that

the concentration of the specific compound in the local environment of the particle or particles up to a substantially complete dissolving of the tablet (1; 1') is sufficiently high to prevent a significant dissolving of the covering or a significant detachment of the covering from the core.

6. Composition according to claim 5, characterized in that the or all the particles (6) are received in at least one cavity (4, 5) of the tablet (1) completely surrounded by the basic composition (2, 3).

7. Composition according to claim 6, characterized in that the at least one cavity (4, 5) contains one or more particles (6) which, alone or together, have essentially the same volume as the cavity (4, 5).

8. Composition according to claim 6, characterized in that the at least one cavity has a larger volume than the or all the particles (6) received in the particular cavity (4, 5).

9. Composition according to claim 8, characterized in that the particle or particles (6) are placed loosely in the interior of the cavity (4, 5).

10. Composition according to claim 8, characterized in that the particle or particles (6) are fixed in the interior of the cavity (4, 5).

11. Composition according to claim 10, characterized in that the particle or particles (6) are fixed by an adhesive in the interior of the cavity (4, 5).

12. Composition according to one of the claims 6 to 11, characterized in that the cavity (4, 5) is positioned substantially centrally in the interior of the tablet (1).

13. Composition according to one of the claims 6 to 12, characterized in that the tablet (1) has a single, substantially spherical cavity (4, 5).

14. Composition according to one of the claims 8 to 13, characterized in that the cavity (4, 5) contains a single, substantially spherical particle (6), whose external diameter is smaller than the internal diameter of the cavity.

15. Composition according to claim 5, characterized in that the or all the particles (6'; 6'') are received in at least one cavity (4') of the tablet (1'), which is only partly surrounded by the basic composition.

16. Composition according to claim 15, characterized in that the cavity is a depression (4') in one of the surfaces (11') of the tablet (1') in which the

particle or particles (6'; 6") are at least partly received.

17. Composition according to claim 15 or 16, characterized in that the particle or particles are placed in the cavity or depression (4') in such a way that they do not project over the surface or surfaces (11') of the tablet (1').

18. Composition according to one of the claims 15 to 17, characterized in that the cavity or depression (4') only contains a single particle (6'; 6"), whose volume and shape in the vicinity of the cavity or depression substantially coincides with the volume and shape of the cavity or depression (4') and substantially completely fills the same.

19. Composition according to one of the claims 15 to 18, characterized in that the cavity or depression (4'), parallel to one of the surface or surfaces (11') to which it opens or in which it is placed, has a substantially circular cross-sectional surface.

20. Composition according to one of the claims 15 to 19, characterized in that the cavity or depression (4') only opens to the surface or surfaces (11') to the extent that the particle or particles (6'; 6") located therein cannot pass out of the opening or openings of the cavity or depression (4').

21. Composition according to claim 20, characterized in that the particle or particles (6'; 6") are loosely arranged in the cavity or depression (4').

22. Composition according to one of the claims 15 to 20, characterized in that the particle or particles are fixed in the cavity or depression (4').

23. Composition according to claim 22, characterized in that the particle or particles (6'; 6") are fixed by an adhesive (10') in the cavity or depression (4').

24. Composition according to one of the preceding claims, characterized in that the covering (9; 9'; 9") comprises at least one compound, which at the concentration of the specific compound prior to the inflow of fresh water is not or is only slightly soluble and at the concentration of the specific compound following the inflow of an adequate quantity of fresh water has an adequate solubility for it to be so significantly dissolved or detached from the core or cores that an at least partial escape of the core material into the surrounding medium is made possible.

25. Composition according to claim 24, characterized in that the solubility

of the compound increases with decreasing OH<sup>-</sup> ionic concentration and therefore decreasing pH-value in the surrounding medium.

26. Composition according to claim 25, characterized in that the compound comprises a polymer.

27. Composition according to claim 26, characterized in that the compound comprises a pH-sensitive polymer, which comprises at least one repeat unit, which has at least one basic function not forming part of the polymer backbone chain.


28. Composition according to claim 27, characterized in that the polymer comprises at least one repeat unit based on a compound chosen from the group consisting of vinyl alcohol derivatives, acrylates or alkyl acrylates having said basic function.

29. Composition according to claim 27, characterized in that the polymer is a carbohydrate functionalized with said basic function.

30. Composition according to one of the claims 27 to 29, characterized in that the basic function is an amine.


31. Composition according to claim 30, characterized in that the basic function is a secondary or tertiary amine.

32. Composition according to claim 31, characterized in that the repeat unit is based on a compound with the following formula III:

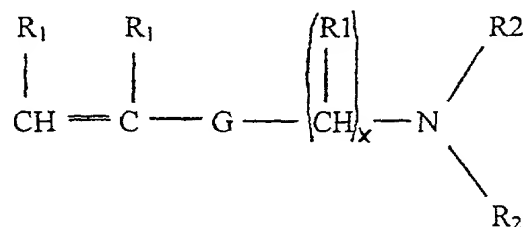

in which G is a linking group selected from -COO-, -OCO-, -CONH-, -NHCO-, -NHCONH-, -NHCOO-, -OCONH- or -OCOO-, R<sub>1</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 3 carbon atoms, R<sub>2</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 5 carbon atoms and x is an integer from 1 to 6.

33. Composition according to claim 32, characterized in that the repeat unit is based on a compound with the following formula IV.

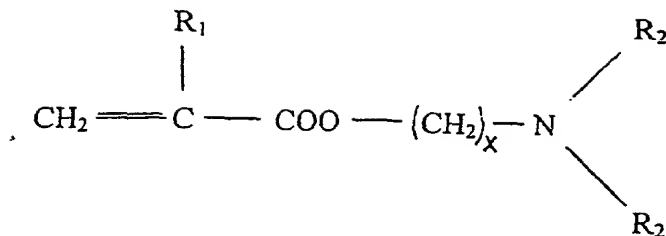

in which R<sub>1</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 3 carbon atoms, R<sub>2</sub>, independently of one another, is hydrogen or an alkyl group with 1 to 5 carbon atoms and x is an integer from 1 to 6.

34. Composition according to one of the claims 27 to 29, characterized in that the basic function is an imine.

35. Composition according to one of the claims 27 to 29, characterized in that the basic function is a basic, aromatic N-containing group.

36. Composition according to claim 35, characterized in that the basic function is a pyridine group.

37. Composition according to claim 35, characterized in that the basic function is an imidazole group.

38. Composition according to claim 29, characterized in that the pH-sensitive polymer is derived from chitosan.

39. Composition according to claim 24, characterized in that the compound comprises K-carrageenan.

40. Composition according to claim 24, characterized in that the solubility of the compound increases with decreasing H<sup>+</sup> ion concentration and therefore increasing pH-value in the surrounding medium.

41. Composition according to claim 40, characterized in that the compound comprises a polymer.

42. Composition according to claim 41, characterized in that the compound comprises a pH-sensitive polymer having at least one repeat unit, which is based on a compound having an acid function.


43. Composition according to claim 42, characterized in that the polymer has at least one repeat unit based on a compound which is selected from the group of vinyl alcohol derivatives, acrylates or alkyl acrylates having said acid

function.

44. Composition according to claim 42, characterized in that the polymer is a carbohydrate functionalized with said acid function.


45. Composition according to one of the claims 42 to 44, characterized in that the acid function is a carboxyl group:

46. Composition according to claim 45, characterized in that the repeat unit is based on a compound with the following formula V:



in which G is a linking group selected from -COO-, -OCO-, -CONH-, -MHCO-, -NHCONH-, -NHCOO-, -OCONH- or -OCOO-, B, independently of one another, is a hydrocarbon group selected from straight or branched-chain, saturated or unsaturated, optionally substituted alkylene, arylene or aralkylene, Ak is hydrogen or an alkyl group, preferably with 1 to 4 carbon atoms, x, y and z, independently of one another, are either 0 or 1 and w is an integer from 1 to 3.

47. Composition according to claim 46, characterized in that the repeat unit is based on a compound with the following formula VI:



in which B, independently of one another, is a hydrocarbon group selected from straight or branched-chain, saturated or unsaturated, optionally substituted alkylene, arylene or aralkylene, Ak is hydrogen or an alkyl group, preferably with 1 to 4 carbon atoms, y and z, independently of one another, are either 0 or 1, and w is an integer from 1 to 3.

48. Composition according to claim 44, characterized in that the pH-sensitive polymer is derived from a polysaccharide by partial esterification of some of its free hydroxyl group with a polycarboxylic acid and/or by partial etherification of some of its free hydroxyl groups with a product obtained by the esterification of one mole of a polycarboxylic acid with one mole of a polyol.



49. Composition according to one of the preceding claims, characterized in that the core or cores (8; 8'; 8'') comprises at least one material chosen from the group consisting of fragrances, disinfectants and pH-indicators.

50. Composition according to claim 49, characterized in that the core (8; 8') or at least part of the cores (8'') is in the form of an encapsulated liquid.

51. Composition according to claim 49 or 50, characterized in that the core (8; 8') or at least part of the cores (8'') is in solid form.

ABSTRACT

Composition for use in a water tank in the kitchen or sanitary sector, characterized by a basic composition essentially evolving its function following addition to a first water filling of the water tank, in the form of a tablet and at least one particle, with at least one core, which comprises at least one substance evolving its function essentially following an at least partial emptying of the first water filling from the water tank and the inflow of fresh water and a covering substantially completely surrounding the core or cores comprising at least one compound, whose solubility increases with decreasing concentration of a specific ion in the surrounding medium, the at least one particle being so arranged in or on the tablet that the surface of the particle or particles is at most only partly in direct contact with the surface of the basic composition surrounding the same and the concentration of the specific ion in the local environment of the particle or particles is sufficiently high up to a substantially complete dissolving of the tablet in order to prevent a substantial dissolving of the covering or a substantial detachment of the covering from the core or cores.

## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled COMPOSITION FOR USE IN A WATER RESERVOIR, the specification of which:

☐ is attached hereto.

☐ was filed on \_\_\_ as Application Serial No. \_\_\_ and was amended on \_\_\_\_\_.

☒ was described and claimed in PCT International Application No. PCT/TR99/00036 filed on 29 July 1999 and was amended under PCT Article 19 on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above- identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35 United States Code § 119 of any foreign applications(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

<u>COUNTRY</u>	<u>APPLICATION NO.</u>	<u>FILING DATE</u>	<u>PRIORITY CLAIMED</u>
Germany	198 34 178.4	29 July 1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Frederick H. Rabin, Reg. No. 24,488  
John B. Pegram, Reg. No. 25,198  
Richard P. Ferrara, Reg. No. 30,632  
Samuel Borodach, Reg. No. 38,388

Andrew N. Parfomak, Reg. No. 32,431  
William J. Hone, Reg. No. 26,739  
Stephan J. Filipek, Reg. No. 33,384  
Chris T. Mizumoto, Reg. No. 42,899



Address all telephone calls to FREDERICK H. RABIN at telephone number (212) 765-5070.

Address all correspondence to FREDERICK H. RABIN, at:

FISH & RICHARDSON P.C.  
45 Rockefeller Plaza, Suite 2800  
New York, NY 10111

**Combined Declaration and Power of Attorney**

Page 2 of 3 pages

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

1-00  
Full Name of Inventor: GUIDO WASCHENBACH

Inventor's Signature: *G. Waschenbach* Date: 1 March 2001

Residence: Oakland, New Jersey NJ  
Citizenship: Germany  
Post Office Address: 4 Winding Ridge  
Oakland, New Jersey 07436

2-00  
Full Name of Inventor: RALF WIEDEMANN

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Griesheim, Germany  
Citizenship: Germany DE  
Post Office Address: Langgasserweg 10  
64347 Griesheim,  
GERMANY

3-00  
Full Name of Inventor: ENRIC CARBONELL

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Barcelona, Spain  
Citizenship: Spain  
Post Office Address: c/Pau Alcover, 39  
E-08017 Barcelona  
SPAIN

Full Name of Inventor : EDGAR ENDLEIN

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Lampertheim, Germany  
Citizenship: Germany  
Post Office Address: Sandtorferweg 113a  
D-68623 Lampertheim  
GERMANY

**Combined Declaration and Power of Attorney**

Page 3 of 3 pages

Full Name of Inventor : KARL-LUDWIG GIBIS

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Ludwigshafen, Germany  
Citizenship: Germany  
Post Office Address: Adlerstrasse 6  
D-67065 Ludwigshafen  
GERMANY

h:\patents\shared\dm\crspndnc\10585P4-USCombDecP

## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled COMPOSITION FOR USE IN A WATER RESERVOIR, the specification of which:

☐ is attached hereto.

☐ was filed on \_\_\_ as Application Serial No. \_\_\_ and was amended on \_\_\_\_\_.

☒ was described and claimed in PCT International Application No. PCT/TR99/00036 filed on 29 July 1999 and was amended under PCT Article 19 on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above- identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35 United States Code § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

COUNTRY	APPLICATION NO.	FILING DATE	PRIORITY CLAIMED
Germany	198 34 178.4	29 July 1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Frederick H. Rabin, Reg. No. 24,488  
John B. Pegram, Reg. No. 25,198  
Richard P. Ferrara, Reg. No. 30, 632  
Samuel Borodach, Reg. No. 38,388

Andrew N. Parfomak, Reg. No. 32,431  
William J. Hone, Reg. No. 26,739  
Stephan J. Filipek, Reg. No. 33,384  
Chris T. Mizumoto, Reg. No. 42,899

Address all telephone calls to FREDERICK H. RABIN at telephone number (212) 765-5070.

Address all correspondence to FREDERICK H. RABIN, at:

FISH & RICHARDSON P.C.  
45 Rockefeller Plaza, Suite 2800  
New York, NY 10111

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States

**Combined Declaration and Power of Attorney**  
Page 2 of 3 pages

Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: GUIDO WASCHENBACH

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Oakland, New Jersey  
Citizenship: Germany  
Post Office Address: 4 Winding Ridge  
Oakland, New Jersey 07436

Full Name of Inventor: ~~RALE WIEDEMANN~~

Inventor's Signature: *Ralf Wiede* Date: *12. March, 2001*

Residence: Griesheim, Germany  
Citizenship: Germany  
Post Office Address: Langgasserweg 10  
64347 Griesheim,  
GERMANY

Full Name of Inventor: ENRIC CARBONELL

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Barcelona, Spain  
Citizenship: Spain  
Post Office Address: c/Pau Alcover, 39  
E-08017 Barcelona  
SPAIN

Full Name of Inventor : EDGAR ENDLEIN


Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Lampertheim, Germany  
Citizenship: Germany  
Post Office Address: Sandtorferweg 113a  
D-68623 Lampertheim  
GERMANY

**Combined Declaration and Power of Attorney**  
Page 3 of 3 pages

Full Name of Inventor : KARL-LUDWIG GIBIS

5-60  
Inventor's Signature:



Date: 12 March 2001

Residence: Ludwigshafen, Germany  
Citizenship: Germany  
Post Office Address: Adlerstrasse 6  
D-67065 Ludwigshafen  
GERMANY

DEU



## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled COMPOSITION FOR USE IN A WATER RESERVOIR, the specification of which:

☐ is attached hereto.

☐ was filed on \_\_\_ as Application Serial No. \_\_\_ and was amended on \_\_\_\_\_.

☒ was described and claimed in PCT International Application No. PCT/TR99/00036 filed on 29 July 1999 and was amended under PCT Article 19 on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above- identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35 United States Code § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

<u>COUNTRY</u>	<u>APPLICATION NO.</u>	<u>FILING DATE</u>	<u>PRIORITY CLAIMED</u>
Germany	198 34 178.4	29 July 1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Frederick H. Rabin, Reg. No. 24,488  
John B. Pegram, Reg. No. 25,198  
Richard P. Ferrara, Reg. No. 30, 632  
Samuel Borodach, Reg. No. 38,388

Andrew N. Parfomak, Reg. No. 32,431  
William J. Hone, Reg. No. 26,739  
Stephan J. Filipek, Reg. No. 33,384  
Chris T. Mizumoto, Reg. No. 42,899

Address all telephone calls to FREDERICK H. RABIN at telephone number (212) 765-5070.

Address all correspondence to FREDERICK H. RABIN, at:

FISH & RICHARDSON P.C.  
45 Rockefeller Plaza, Suite 2800  
New York, NY 10111

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States

**Combined Declaration and Power of Attorney**  
Page 2 of 3 pages

Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: GUIDO WASCHENBACH

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Oakland, New Jersey  
Citizenship: Germany  
Post Office Address: 4 Winding Ridge  
Oakland, New Jersey 07436

Full Name of Inventor: RALF WIEDEMANN

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Griesheim, Germany  
Citizenship: Germany  
Post Office Address: Langgasserweg 10  
64347 Griesheim,  
GERMANY

Full Name of Inventor: ENRIC CARBONELL

Inventor's Signature: Carbonell Date: 28 February 2001

Residence: Barcelona, Spain  
Citizenship: Spain  
Post Office Address: c/Pau Alcover, 39  
E-08017 Barcelona  
SPAIN

EX

Full Name of Inventor : EDGAR ENDLEIN

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Lampertheim, Germany  
Citizenship: Germany  
Post Office Address: Sandtorferweg 113a  
D-68623 Lampertheim  
GERMANY

**Combined Declaration and Power of Attorney**  
Page 3 of 3 pages

Full Name of Inventor : KARL-LUDWIG GIBIS

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Ludwigshafen, Germany  
Citizenship: Germany  
Post Office Address: Adlerstrasse 6  
D-67065 Ludwigshafen  
GERMANY

## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled COMPOSITION FOR USE IN A WATER RESERVOIR, the specification of which:

☐ is attached hereto.

☐ was filed on \_\_\_ as Application Serial No. \_\_\_ and was amended on \_\_\_\_\_.

☒ was described and claimed in PCT International Application No. PCT/TR99/00036 filed on 29 July 1999 and was amended under PCT Article 19 on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above- identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35 United States Code § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

<u>COUNTRY</u>	<u>APPLICATION NO.</u>	<u>FILING DATE</u>	<u>PRIORITY CLAIMED</u>
Germany	198 34 178.4	29 July 1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Frederick H. Rabin, Reg. No. 24,488  
John B. Pegram, Reg. No. 25,198  
Richard P. Ferrara, Reg. No. 30, 632  
Samuel Borodach, Reg. No. 38,388

Andrew N. Parfomak, Reg. No. 32,431  
William J. Hone, Reg. No. 26,739  
Stephan J. Filipek, Reg. No. 33,384  
Chris T. Mizumoto, Reg. No. 42,899

Address all telephone calls to FREDERICK H. RABIN at telephone number (212) 765-5070.

Address all correspondence to FREDERICK H. RABIN, at:

FISH & RICHARDSON P.C.  
45 Rockefeller Plaza, Suite 2800  
New York, NY 10111

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States

**Combined Declaration and Power of Attorney**

Page 2 of 3 pages

Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: GUIDO WASCHENBACH

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Oakland, New Jersey  
Citizenship: Germany  
Post Office Address: 4 Winding Ridge  
Oakland, New Jersey 07436

Full Name of Inventor: RALF WIEDEMANN

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Griesheim, Germany  
Citizenship: Germany  
Post Office Address: Langgasserweg 10  
64347 Griesheim,  
GERMANY

Full Name of Inventor: ENRIC CARBONELL

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Barcelona, Spain  
Citizenship: Spain  
Post Office Address: c/Pau Alcover, 39  
E-08017 Barcelona  
SPAIN

Full Name of Inventor : EDGAR ENDLEIN

Inventor's Signature: Edgar Endlein Date: 27<sup>th</sup> of MARCH, 2001

Residence: Wrestedt, Germany  
Citizenship: Germany  
Post Office Address: Hauptstrasse 6  
29559 Wrestedt  
GERMANY

DEY

4-60

**Combined Declaration and Power of Attorney**  
Page 3 of 3 pages

Full Name of Inventor : KARL-LUDWIG GIBIS

Inventor's Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Residence: Ludwigshafen, Germany  
Citizenship: Germany  
Post Office Address: Adlerstrasse 6  
D-67065 Ludwigshafen  
GERMANY